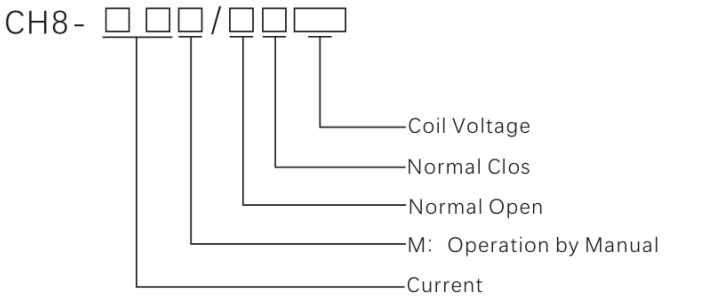
1 Applicable scope

The CH8 modular contactor (hereinafter referred to as contactor) is mainly suitable for AC 50Hz (or 60Hz), rated working voltage to 400V and rated current operation in the circuit up to 100A, it can control the low-inductance and low-inductance load of household appliances and similar purposes; it can also be used to control the load of household motors. The power should be reduced accordingly.

The CH8 contactors according to standard IEC/EN61095 and are used mainly in buildings for switching and controlling lighting, heating, ventilation and pumps. They are part of the complete range of Din rail products and can be integrated easily in dedicated panels.



2 AC24V-AC240V Modular contactor



(eg. CH8-25/20 230V . It is 25A , 2NO ,230V AC current coil voltage)






AC 1P,1modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-16/10	16A	6A	24 110 240	
CH8-20/10	20A	7A		
CH8-25/10	25A	9A		
CH8-16/01	16A	6A	24 110 240	
CH8-20/01	20A	7A		
CH8-25/01	25A	9A		

NewTrend






AC 2P,1modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-16/20	16A	6A	24 110 240	
CH8-20/20	20A	7A		
CH8-25/20	25A	9A		
CH8-16/11	16A	6A	24 110 240	
CH8-20/11	20A	7A		
CH8-25/11	25A	9A		
CH8-16/02	16A	6A	24 110 240	
CH8-20/02	20A	7A		
CH8-25/02	25A	9A		






AC 2P,2modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-32/20	32A	12A	24 110 240	
CH8-40/20	40A	18A		
CH8-63/20	63A	25A		
CH8-32/11	32A	12A	24 110 240	
CH8-40/11	40A	18A		
CH8-63/11	63A	25A		
CH8-32/02	32A	12A	24 110 240	
CH8-40/02	40A	18A		
CH8-63/02	63A	25A		





AC 2P,3modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-100/20	100A	-	24 110 240	
CH8-100/11	100A	-	24 110 240	
CH8-100/02	100A	-	24 110 240	





AC 3P,2modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-16/30	16A	6A	24 110 240	
CH8-20/30	20A	7A		
CH8-25/30	25A	9A		
CH8-16/03	16A	6A	24 110 240	
CH8-20/03	20A	7A		
CH8-25/03	25A	9A		







AC 3P,3modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-32/30	32A	12A	24 110 240	
CH8-40/30	40A	18A		
CH8-63/30	63A	25A		
CH8-32/03	32A	12A	24 110 240	
CH8-40/03	40A	18A		
CH8-63/03	63A	25A		







AC 4P,2modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-16/40	16A	6A	24 110 240	
CH8-20/40	20A	7A		
CH8-25/40	25A	9A		
CH8-16/04	16A	6A	24 110 240	
CH8-20/04	20A	7A		
CH8-25/04	25A	9A		
CH8-16/22	16A	6A	24 110 240	
CH8-20/22	20A	7A		
CH8-25/22	25A	9A		
CH8-16/31	16A	6A	24 110 240	
CH8-20/31	20A	7A		
CH8-25/31	25A	9A		

NewTrend





AC 4P,2modules



Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-32/40	32A	12A	24 110 240	
CH8-40/40	40A	18A		
CH8-63/40	63A	25A		
CH8-32/04	32A	12A	24 110 240	
CH8-40/04	40A	18A		
CH8-63/04	63A	25A		
CH8-32/22	32A	12A	24 110 240	
CH8-40/22	40A	18A		
CH8-63/22	63A	25A		
CH8-32/31	32A	12A	24 110 240	
CH8-40/31	40A	18A		
CH8-63/31	63A	25A		



AC 4P,6modules



Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-100/40	100A	–	24 110 240	
CH8-100/04	100A	–	24 110 240	
CH8-100/22	100A	–	24 110 240	
CH8-100/31	100A	–	24 110 240	






AC 1P,1modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-16M/10	16A	6A	24 110 240	
CH8-20M/10	20A	7A		
CH8-25M/10	25A	9A		
CH8-16M/01	16A	6A	24 110 240	
CH8-20M/01	20A	7A		
CH8-25M/01	25A	9A		






AC 2P,1modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-16M/20	16A	6A	24 110 240	
CH8-20M/20	20A	7A		
CH8-25M/20	25A	9A		
CH8-16M/11	16A	6A	24 110 240	
CH8-20M/11	20A	7A		
CH8-25M/11	25A	9A		
CH8-16M/02	16A	6A	24 110 240	
CH8-20M/02	20A	7A		
CH8-25M/02	25A	9A		





AC 2P,2modules


Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-32M/20	32A	12A	24 110 240	
CH8-40M/20	40A	18A		
CH8-63M/20	63A	25A		
CH8-32M/11	32A	12A	24 110 240	
CH8-40M/11	40A	18A		
CH8-63M/11	63A	25A		
CH8-32M/02	32A	12A	24 110 240	
CH8-40M/02	40A	18A		
CH8-63M/02	63A	25A		

NewTrend





AC 3P,2modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-16M/30	16A	6A	24 110 240	
CH8-20M/30	20A	7A		
CH8-25M/30	25A	9A		
CH8-16M/03	16A	6A	24 110 240	
CH8-20M/03	20A	7A		
CH8-25M/03	25A	9A		







AC 3P,3modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-32M/30	32A	12A	24 110 240	
CH8-40M/30	40A	18A		
CH8-63M/30	63A	25A		
CH8-32M/03	32A	12A	24 110 240	
CH8-40M/03	40A	18A		
CH8-63M/03	63A	25A		







AC 4P,2modules

Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-16M/40	16A	6A	24 110 240	
CH8-20M/40	20A	7A		
CH8-25M/40	25A	9A		
CH8-16M/04	16A	6A	24 110 240	
CH8-20M/04	20A	7A		
CH8-25M/04	25A	9A		
CH8-16M/22	16A	6A	24 110 240	
CH8-20M/22	20A	7A		
CH8-25M/22	25A	9A		
CH8-16M/31	16A	6A	24 110 240	
CH8-20M/31	20A	7A		
CH8-25M/31	25A	9A		



AC 4P,2modules

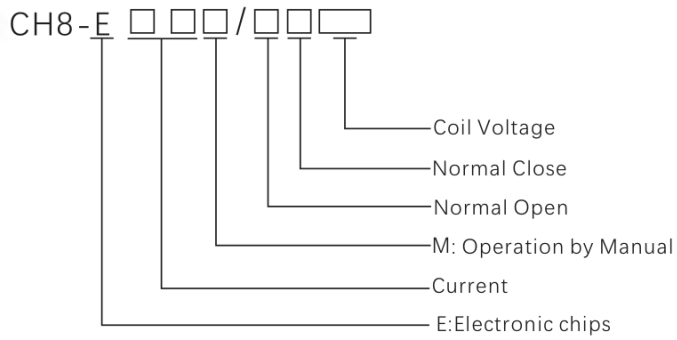
Contactor Model	Rated Current		Control Voltage (V AC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-32M/40	32A	12A	24 110 240	
CH8-40M/40	40A	18A		
CH8-63M/40	63A	25A		
CH8-32M/04	32A	12A	24 110 240	
CH8-40M/04	40A	18A		
CH8-63M/04	63A	25A		
CH8-32M/22	32A	12A	24 110 240	
CH8-40M/22	40A	18A		
CH8-63M/22	63A	25A		
CH8-32M/31	32A	12A	24 110 240	
CH8-40M/31	40A	18A		
CH8-63M/31	63A	25A		

AC Modular contactor power consumption

Poles	Rated Current		Control Voltage (VAC)(50Hz)	Power consumption		Max Power
	AC-7a	AC-7b		Hold on	Pull in	
IP	16A	6A	230...240	2.7VA	9.2VA	1.2W
	20A	7A	230...240	2.7VA	9.2VA	1.2W
	25A	9A	230...240	2.7VA	9.2VA	1.2W
2P	16A	6A	230...240	2.7VA	9.2VA	1.2W
	20A	7A	230...240	2.7VA	9.2VA	1.2W
	25A	9A	24	3.8VA	15VA	1.3W
			230...240	2.7VA	9.2VA	1.2W
	32A	12A	220...240	4.6VA	34VA	1.6W
	40A	18A	220...240	4.6VA	34VA	1.6W
	63A	25A	220...240	4.6VA	34VA	1.6W
	100A	-	220...240	6.5VA	53VA	2.1W
3P	16A	6A	220...240	4.6VA	34VA	1.6W
	20A	7A	220...240	4.6VA	34VA	1.6W
	25A	9A	220...240	4.6VA	34VA	1.6W
	32A	12A	220...240	6.5VA	53VA	2.1W
	40A	18A	220...240	6.5VA	53VA	2.1W
	63A	25A	220...240	6.5VA	53VA	2.1W
4P	16A	6A	220...240	4.6VA	34VA	1.6W
	20A	7A	220...240	4.6VA	34VA	1.6W
	25A	9A	24	4.6VA	34VA	1.6W
			220...240	4.6VA	34VA	1.6W
	32A	12A	220...240	6.5VA	53VA	2.1W
	40A	18A	220...240	6.5VA	53VA	2.1W
	63A	25A	220...240	6.5VA	53VA	2.1W
	100A	-	220...240	13VA	106VA	4.2W

NewTrend

3 DC12V-DC24V Modular contactor






- Use in smart controls system
- Humming free

(e.g. CH8-E25/20 DC12V，It is 25A，2NO，12V DC current coil voltage with electronic chips)






DC 2P,2modules

Contactor Model	Rated Current		Control Voltage (V DC)	Circuit Diagram
	AC-7a	AC-7b		
CH8-E16/20	16A	6A	12 24 10-30	
CH8-E20/20	20A	7A		
CH8-E25/20	25A	9A		
CH8-E16/02	16A	6A	12 24 10-30	
CH8-E20/02	20A	7A		
CH8-E25/02	25A	9A		
CH8-E16/11	16A	6A	12 24 10-30	
CH8-E20/11	20A	7A		
CH8-E25/11	25A	9A		



DC 2P,2modules

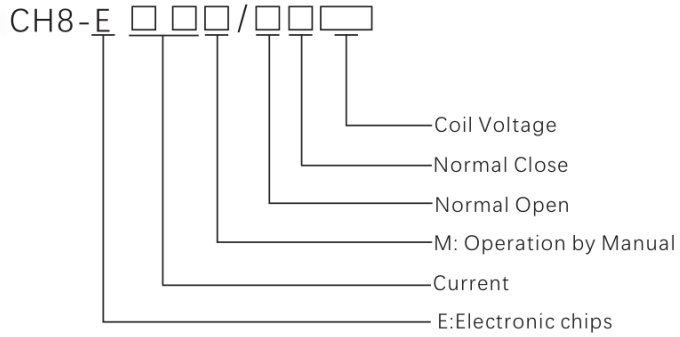
Contactor Model	Rated Current		Control Voltage (V DC)	Circuit Diagram
	AC-7a	AC-7b		
CH8-E16M/20	16A	6A	12 24 10-30	
CH8-E20M/20	20A	7A		
CH8-E25M/20	25A	9A		
CH8-E16M/02	16A	6A	12 24 10-30	
CH8-E20M/02	20A	7A		
CH8-E25M/02	25A	9A		
CH8-E16M/11	16A	6A	12 24 10-30	
CH8-E20M/11	20A	7A		
CH8-E25M/11	25A	9A		

DC Modular Contactor DC power consumption

Poles	Rated Current		Control Voltage (V DC)	Power consumption	
	AC-7a	AC-7b		Hold on	Pull in
2P	16A	6A	12	0.4VA	9VA
			24	0.4VA	9VA
	20A	7A	12	0.4VA	9VA
			24	0.4VA	9VA
	25A	9A	12	0.4VA	9VA
			24	0.4VA	9VA

NewTrend




4 AC/DC24V-AC/DC240V Modular contactor



eg. CH8-E25/20 AC230V, It is 25A, 2NO, 230V AC current coil voltage with electronic chips)







AC/DC 2P,2modules

Contactor Model	Rated Current		Control Voltage (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-E32/20	32A	12A	24 36 18-40 90-260	
CH8-E40/20	40A	18A		
CH8-E63/20	63A	25A		
CH8-E32/11	32A	12A	24 36 18-40 90-260	
CH8-E40/11	40A	18A		
CH8-E63/11	63A	25A		
CH8-E32/02	32A	12A	24 36 18-40 90-260	
CH8-E40/02	40A	18A		
CH8-E63/02	63A	25A		







AC/DC 4P,2modules

Contactor Model	Rated Current		Control Voltage (V AC/DC)(50Hz)	Circuit Diagram
	AC–7a	AC–7b		
CH8-E16/40	16A	6A	24 36 18–40 90–260	
CH8-E20/40	20A	7A		
CH8-E25/40	25A	9A		
CH8-E16/04	16A	6A	24 36 18–40 90–260	
CH8-E20/04	20A	7A		
CH8-E25/04	25A	9A		
CH8-E16/22	16A	6A	24 36 18–40 90–260	
CH8-E20/22	20A	7A		
CH8-E25/22	25A	9A		
CH8-E16/31	16A	6A	24 36 18–40 90–260	
CH8-E20/31	20A	7A		
CH8-E25/31	25A	9A		






AC/DC 4P,3modules

Contactor Model	Rated Current		Control Voltage (V AC/DC)(50Hz)	Circuit Diagram
	AC–7a	AC–7b		
CH8-E32/40	32A	12A	24 36 18–40 90–260	
CH8-E40/40	40A	18A		
CH8-E63/40	63A	25A		
CH8-E32/04	32A	12A	24 36 18–40 90–260	
CH8-E40/04	40A	18A		
CH8-E63/04	63A	25A		
CH8-E32/22	32A	12A	24 36 18–40 90–260	
CH8-E40/22	40A	18A		
CH8-E63/22	63A	25A		
CH8-E32/31	32A	12A	24 36 18–40 90–260	
CH8-E40/31	40A	18A		
CH8-E63/31	63A	25A		

NewTrend







AC/DC 2P,2modules

Contactor Model	Rated Current		Control Voltage (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-E32M/20	32A	12A	24 36 18-40 90-260	
CH8-E40M/20	40A	18A		
CH8-E63M/20	63A	25A		
CH8-E32M/11	32A	12A	24 36 18-40 90-260	
CH8-E40M/11	40A	18A		
CH8-E63M/11	63A	25A		
CH8-E32M/02	32A	12A	24 36 18-40 90-260	
CH8-E40M/02	40A	18A		
CH8-E63M/02	63A	25A		



AC/DC 4P,2modules





Contactor Model	Rated Current		Control Voltage (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-E16M/40	16A	6A	24 36 18-40 90-260	
CH8-E20M/40	20A	7A		
CH8-E25M/40	25A	9A		
CH8-E16M/04	16A	6A	24 36 18-40 90-260	
CH8-E20M/04	20A	7A		
CH8-E25M/04	25A	9A		
CH8-E16M/22	16A	6A	24 36 18-40 90-260	
CH8-E20M/22	20A	7A		
CH8-E25M/22	25A	9A		
CH8-E16M/31	16A	6A	24 36 18-40 90-260	
CH8-E20M/31	20A	7A		
CH8-E25M/31	25A	9A		

NewTrend

CH8 Modular contactor



4P,3modules

Contactor Model	Rated Current		Control Voltage (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-E32M/40	32A	12A	24 36 18-40 90-260	
CH8-E40M/40	40A	18A		
CH8-E63M/40	63A	25A		
CH8-E32M/04	32A	12A	24 36 18-40 90-260	
CH8-E40M/04	40A	18A		
CH8-E63M/04	63A	25A		
CH8-E32M/22	32A	12A	24 36 18-40 90-260	
CH8-E40M/22	40A	18A		
CH8-E63M/22	63A	25A		
CH8-E32M/31	32A	12A	24 36 18-40 90-260	
CH8-E40M/31	40A	18A		
CH8-E63M/31	63A	25A		

Modular Contactor AC/DC power consumption

Poles	Rated Current		Control Voltage (V AC/DC)(50Hz)	Power consumption	
	AC-7a	AC-7b		Hold on	Pull in
2P	16A	6A	24	0.4VA	9VA
			230	2.7VA	9.2VA
	20A	7A	24	0.4VA	9VA
			230	2.7VA	9.2VA
	25A	9A	24	0.4VA	9VA
			230	2.7VA	9.2VA
	32A	12A	24	1VA	35VA
			230	4.6VA	34VA
	40A	18A	24	1VA	35VA
			230	4.6VA	34VA
	63A	25A	24	1VA	35VA
			230	4.6VA	34VA
4P	16A	6A	24	1VA	35VA
			230	17.5VA	41VA
	20A	7A	24	1VA	35VA
			230	17.5VA	41VA
	25A	9A	24	1VA	35VA
			230	17.5VA	41VA
	32A	12A	24	12VA	60VA
			230	15VA	52VA
	40A	18A	24	12VA	60VA
			230	15VA	52VA
	63A	25A	24	12VA	60VA
			230	15VA	52VA

NewTrend

5 AC/DC 230V Modular contactor （Duplex Winding）





CH8-D □ □□/□□□

- Coil Voltage
- Normal Close
- Normal Open
- M : Operation by Manual
- Current
- D :Duplex winding

(eg. CH8-D25/20 230V, It is 25A , 2NO ,230V AC current coil voltage with Duplex winding)



AC/DC 4P,3modules

Contactor Model	Rated Current		Control Voltage (V AC/DC)(50Hz)	Circuit Diagram
	AC-7a	AC-7b		
CH8-D32/40	32A	12A	230	
CH8-D40/40	40A	18A		
CH8-D63/40	63A	25A		
CH8-D32/04	32A	12A	230	
CH8-D40/04	40A	18A		
CH8-D63/04	63A	25A		
CH8-D32/22	32A	12A	230	
CH8-D40/22	40A	18A		
CH8-D63/22	63A	25A		
CH8-D32/31	32A	12A	230	
CH8-D40/31	40A	18A		
CH8-D63/31	63A	25A		

AC/DC Modular Contactor duplex winding power consumption

Poles	Rated Current		Control Voltage (V AC/DC)(50Hz)	Power consumption	
	AC-7a	AC-7b		Hold on	Pull in
2P	32A	12A	230	2.2VA	65VA
	40A	18A	230	2.2VA	65VA
	63A	25A	230	2.2VA	65VA

6 Modular contactor auxiliary

6.1 Auxiliary Contacts

The Auxiliary contacts are indicator contactor contacts status switch OFF or ON

	AC-12		AC-15		DC-13		Rated Current	Circuit Diagram
	C.V.	C.A.	C.V.	C.A.	C.V.	C.A.		
CH8-AUC11	240V	5A	230V	2A	DC 130V	1A	5A	
CH8-AUC20	240V	5A	230V	2A	DC 130V	1A	5A	



6.2 Spacing piece

Spacers are used to reduce the temperature rise of devices mounted side by side. It is recommended to separate electronic equipment (temperature adjustment devices, programmable timer etc.) from electromechanical equipment (impulse relays, contactors)


	Technical specifications
Spacing piece	(9mm Multiples)



7 Main parameter and technical performance

Power circuit		
Voltage rating(Ue)	1P,2P	250V AC
	3P,4P	400V AC
Frequency		50/60Hz
Endurance(O-C)		2,000,000 cycles
Electrical		100,000 cycles
Maximum number of switching operation a day		100
Insulation vwltage(Ui)		500 V AC
Pollution degree		2
Rated impulse withstand voltage(Uimp)		2.5kV(4kV for 12/24/48VAC)
Degree of protection (IEC 60529)	Device only	IP20
	Device in modular enclosure	IP40
Operating temperature		-5℃~+60℃
Storage temperature		-40℃~+70℃
Tropicalization(IEC 60068.1)		Treatment 2 (relative humidity 95% at 55℃
ELSV compliance(Extra Low Safety Voltage)for 12/24/48vac versions		
The product control conforms to the SELV(safety extra low voltage)requirements		


(1)In the case of contactor mounting in a enclosure for which the interior temperature is in range detween 50 ℃ and 60 ℃,it is necessary to use a spacer, between each contactor




Clip on DIN rail 35 mm



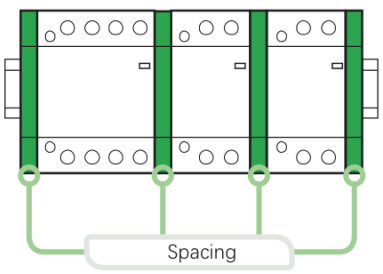
±30°vertical.



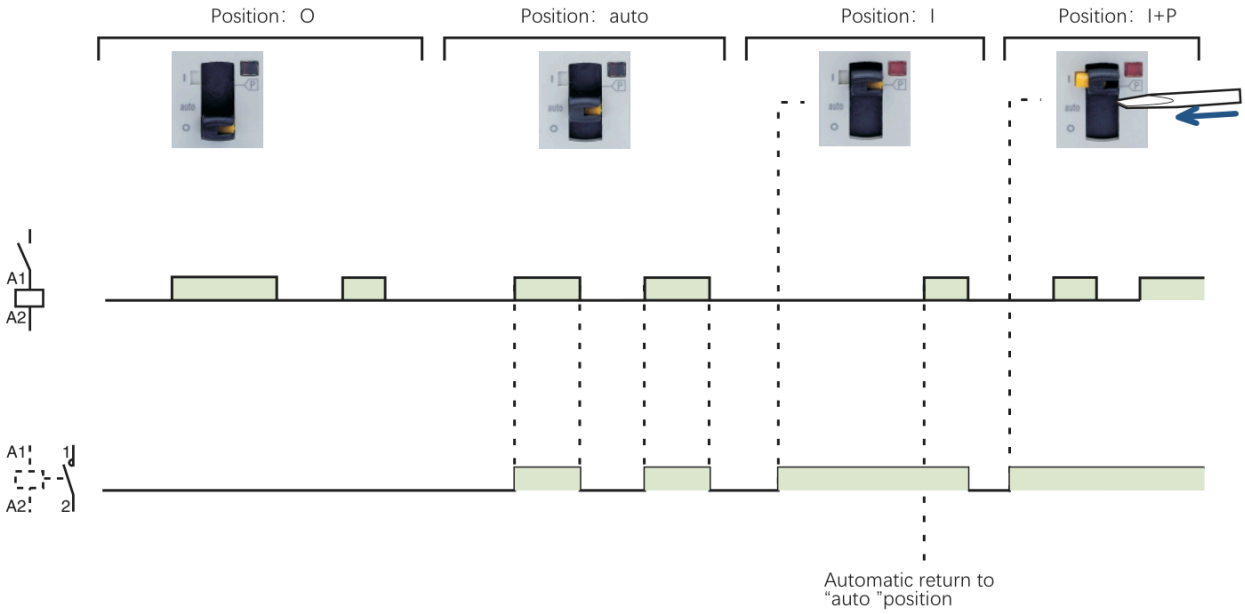
IP20



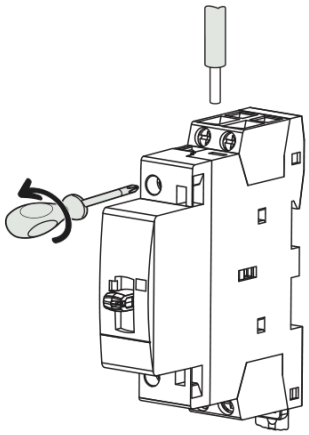
IP40



8 Operation(Manual control contactor)



9 Connection parameter



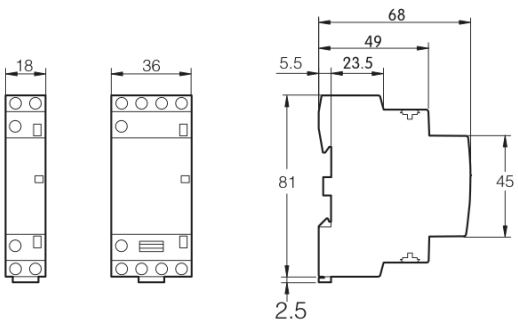
Type		Rating	Lenght tripping	Circuit	Tightening torque	Copper cables	
						Rigid	Flexible or ferrule
CH8	PZ1:4mm	16-100A	9mm	Control	0.8N.m	1.5~2.5mm² 2×1.5mm²	1.5~2.5mm² 2×2.5mm²
		16and25A				1.5~6mm²	1~4mm²
	PZ2:6mm	40A-63A	14mm	Power	3.5N.m	6~25mm²	6~16mm²
		100A				6×3.5mm²	6~35mm²
ACTs	PZ1:4mm	-	9mm	-	0.8N.m	1.5~2.5mm² 2×1.5mm²	1.5~2.5mm² 2×2.5mm²

10 Packing information

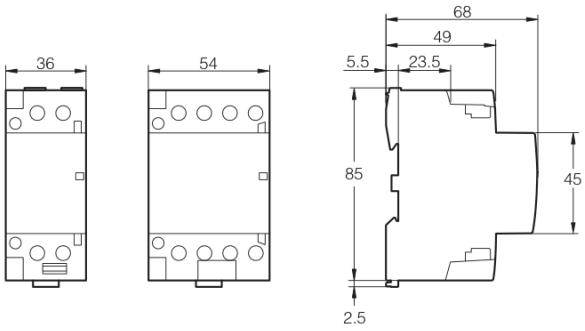
Poles	Rated Current (A)	BOX QTY	CTN QTY	Automatic Contactor		Manual Contactor		CARTON SIZE (mm)
				G.W.(kg)	N.W.(kg)	G.W.(kg)	N.W.(kg)	
AC 1P	16	12	120	15.4	13.8	15.4	13.8	500×260×190
	20	12	120	15.52	13.92	15.52	13.92	500×260×190
	25	12	120	15.52	13.92	15.52	13.92	500×260×190
AC 2P	16	12	120	15.4	13.8	15.4	13.8	500×260×190
	20	12	120	15.52	13.92	15.52	13.92	500×260×190
	25	12	120	15.52	13.92	15.52	13.92	500×260×190
	32	6	60	15.04	13.44	15.04	13.44	500×260×190
	40	6	60	15.04	13.44	15.04	13.44	500×260×190
	63	6	60	15.1	13.5	15.1	13.5	500×260×190
	100	4	40	14.08	12.48	-	-	500×260×190
AC 3P	16	6	60	13.9	12.3	13.9	12.3	500×260×190
	20	6	60	13.9	12.3	13.9	12.3	500×260×190
	25	6	60	13.9	12.3	13.9	12.3	500×260×190
	32	4	40	14.76	13.16	14.76	13.16	500×260×190
	40	4	40	14.76	13.16	14.76	13.16	500×260×190
	63	4	40	14.76	13.16	14.76	13.16	500×260×190
AC 4P	16	6	60	13.9	12.3	13.9	12.3	500×260×190
	20	6	60	13.9	12.3	13.9	12.3	500×260×190
	25	6	60	13.9	12.3	13.9	12.3	500×260×190
	32	4	40	14.76	13.16	14.76	13.16	500×260×190
	40	4	40	14.76	13.16	14.76	13.16	500×260×190
	63	4	40	14.76	13.16	14.76	13.16	500×260×190
	100	2	30	20.2	18.6	-	-	500×260×190
DC 2P	16	12	120	15.52	13.92	15.52	13.92	500×260×190
	20	12	120	15.52	13.92	15.52	13.92	500×260×190
	25	12	120	15.52	13.92	15.52	13.92	500×260×190
AC/DC 2P	32	6	60	15.19	13.59	15.19	13.59	500×260×190
	40	6	60	15.19	13.59	15.19	13.59	500×260×190
	63	6	60	15.19	13.59	15.19	13.59	500×260×190
AC/DC 4P	16	6	60	14.05	12.45	14.05	12.45	500×260×190
	20	6	60	14.05	12.45	14.05	12.45	500×260×190
	25	6	60	14.05	12.45	14.05	12.45	500×260×190
	32	4	40	14.86	13.26	14.86	13.26	500×260×190
	40	4	40	14.86	13.26	14.86	13.26	500×260×190
	63	4	40	14.86	13.26	14.86	13.26	500×260×190
AC/DC 4P (Duplex Winding)	32	4	40	15.2	13.6	15.2	13.6	500×260×190
	40	4	40	15.2	13.6	15.2	13.6	500×260×190
	63	4	40	15.2	13.6	15.2	13.6	500×260×190

Type	BOX QTY	CTN QTY	G.W.(kg)	N.W.(kg)	CARTON SIZE (mm)
Auxiliary Contacts	12	120	5.56	3.96	500×260×190
Spacing piece	50	500	4.35	2.75	500×260×190

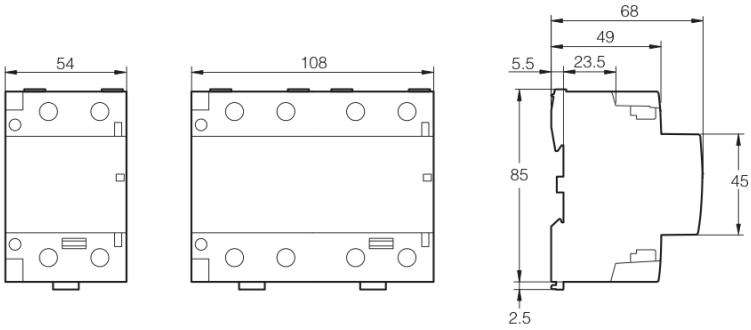
11 Product dimensions (mm)




CH8-16/20/25A



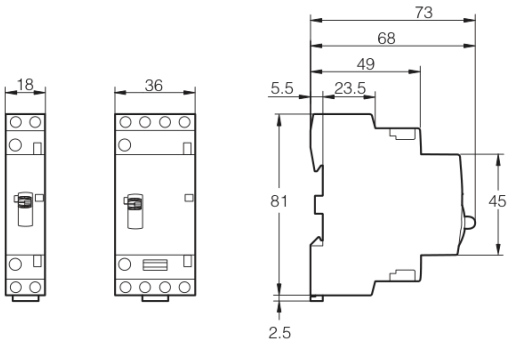
CH8 32/40/63A



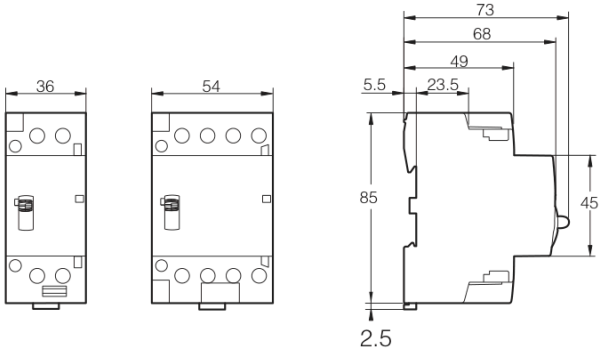
CH8 100A



ACTs



CH8 Manual Contactor16/20/25A



CH8 Manual Contactor 32/40/63A