Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

F-11PV cylindrical PV fuse

15A / 1500V DC / gPV / 20kA

F-11PV is a cylindrical gPV fuse link for compatible photovoltaic DC circuit protection. The exact illustrated unit is marked 15A, 1500V DC, 20kA and IEC 60269-6. Its original dedicated drawing identifies the same physical model and provides a 65mm overall length, 10.3mm diameter and 10.5mm end-cap axial dimension.



Model	F-11PV
Rated current	15A
Rated voltage	1500V DC
DC breaking capacity	20kA
Operating class	gPV
Standard marking	IEC 60269-6
Nominal size marking	10 × 65mm
Terminal type	Cylindrical end caps


Application and protection coordination

For compatible photovoltaic DC circuits, including string and combiner protection arrangements. Match the fuse current and DC voltage to the circuit, verify prospective fault current and protective coordination, and use a holder suitable for the exact fuse dimensions and system voltage. This reference covers the illustrated 15A configuration.

NT-F-11PV-EN | 2026-11

Dimensions and ordering

F-11PV / DIMENSIONS IN MILLIMETRES

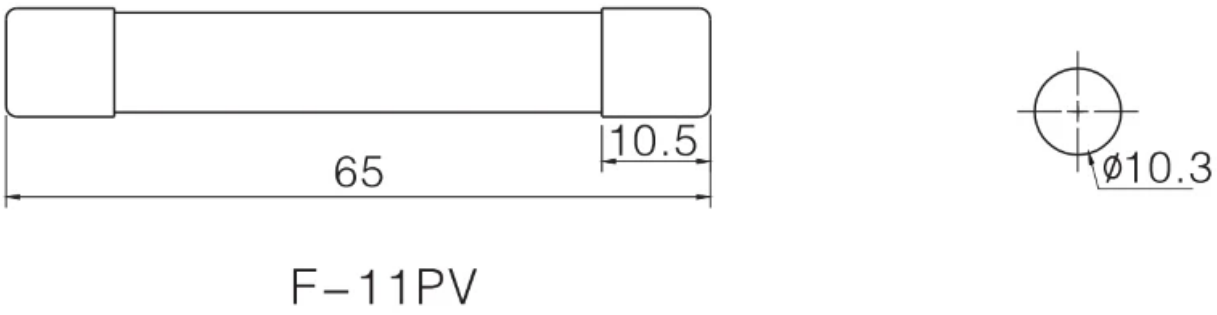

Overall length	65mm
Outside diameter	10.3mm
End-cap axial dimension	10.5mm

Specify your enquiry

Include F-11PV, 15A, 1500V DC, gPV, 20kA and quantity. Confirm the holder mounting and contact arrangement for a 65mm fuse length and 10.3mm outside diameter. State replacement or installation requirements. Isolate the circuit before fuse replacement and follow the supplied equipment instructions.

NT-F-11PV-EN | 2026-11