Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

FPV-H2XLB PV fuse base

1500V DC / 400A / FPV-H2XL FUSE LINK

The NewTrend FPV-H2XLB is an open fuse base rated 400A and 1500V DC for FPV-H2XL photovoltaic fuse links. It combines spring-loaded blade contacts, bolted connection terminals, insulating supports and a metal mounting base. Two mounting holes provide a fixed installation interface.



Model	FPV-H2XLB
Product type	Open PV fuse base
Rated current	400A
Rated voltage	1500V DC
Matching fuse link	FPV-H2XL
Standard reference	IEC 60269
Mounting	Two mounting holes
Terminal arrangement	Blade contacts / bolted terminals

Contact and mounting features


Spring-loaded blade contacts hold the matching fuse link. Bolted terminal studs provide the electrical connection. The insulated supports and two-hole metal base form a fixed panel-mount assembly.

NT-FPV-H2XLB-EN | 2026-11

Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

Mounting and installation reference

FPV-H2XLB / ORIGINAL OUTLINE DRAWING

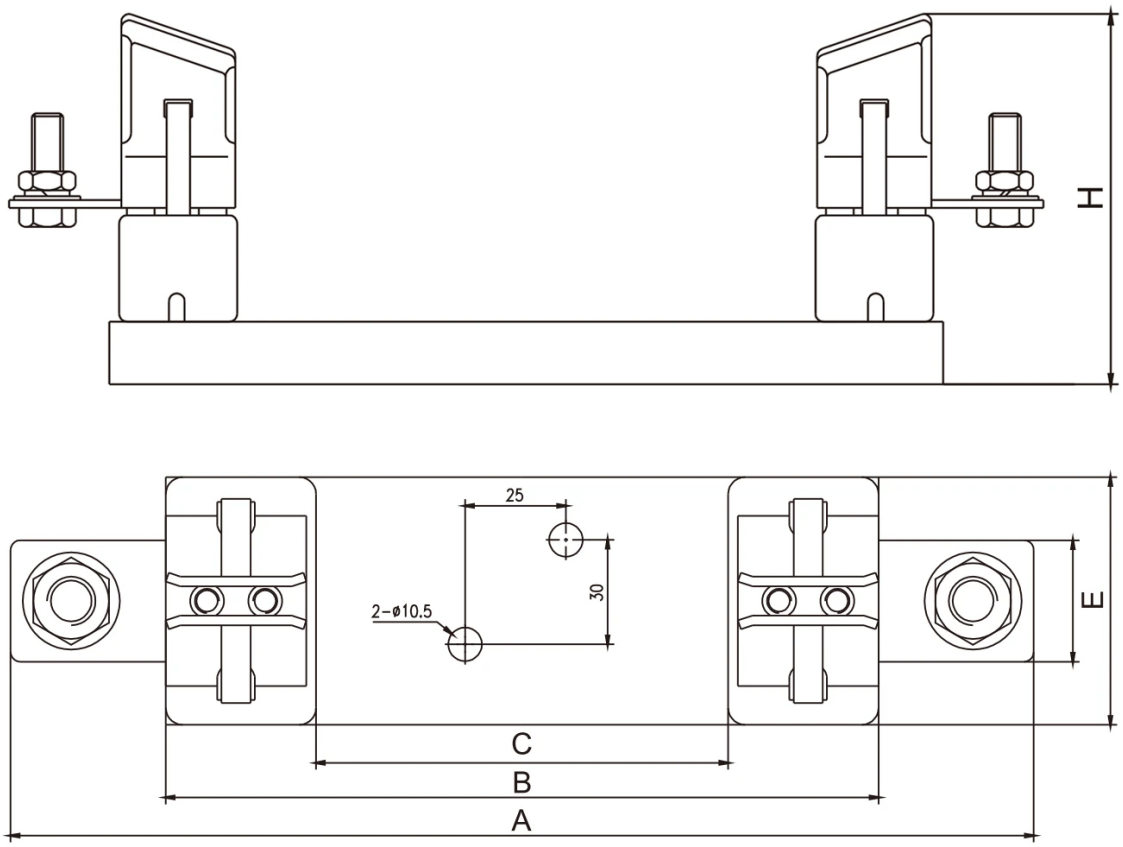

Dimensions in millimetres

A	278mm	B	210mm
C	135mm	E	63mm
H	104mm	Mount holes	2 x Ø10.5mm
Hole X offset	25mm	Hole Y offset	30mm

Specify your enquiry

Include FPV-H2XLB, 400A, 1500V DC, quantity and the matching FPV-H2XL fuse link. Match the contact geometry, terminal arrangement and mounting-hole offsets to the installation.

NT-FPV-H2XLB-EN | 2026-11