Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

FPV-H3LB

630A / 1500V DC / FUSE BASE

FPV-H3LB is a 1500V DC fuse base rated 630A for the FPV-H3L fuse-link format. Its open construction combines blade-contact clips, insulating supports, bolted cable terminals and a metal mounting plate. The dedicated dimensional row identifies a 300mm overall length and 108mm overall height. Fuse link and base are specified separately.



Model	FPV-H3LB
Rated current	630A
Rated voltage	1500V DC
Applicable fuse link	FPV-H3L
Product type	Open fuse base
Cable connection	Bolted terminals
Mounting	Metal plate with fixing holes
Fuse link	Specified separately

Application and selection


Use with the matching FPV-H3L fuse-link format in compatible DC equipment. Verify the circuit voltage, fuse current, contact fit, enclosure and mounting clearances. The fuse link determines protective characteristics and breaking capacity; these are not independent ratings of the base.

NT-FPV-H3LB-EN | 2026-11

Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

Dimensions and ordering

FPV-H3LB / DIMENSIONS IN MILLIMETRES

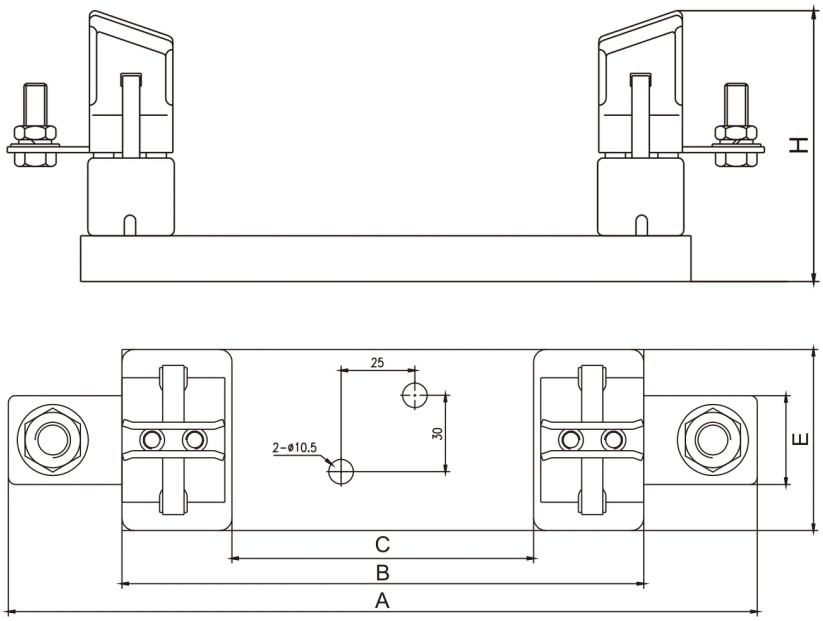

A - Overall length	300mm
B - Reference spacing	210mm
C - Inner reference spacing	135mm
E - Reference width	63mm
H - Overall height	108mm
Fixing holes	2 × Ø10.5mm
Fixing-hole offsets	25mm horizontal / 30mm vertical

Specify your enquiry

Include FPV-H3LB, 630A, 1500V DC and quantity. Specify the matching FPV-H3L fuse link, enclosure and mounting requirements. Isolate the circuit before fuse installation or removal.

NT-FPV-H3LB-EN | 2026-11