Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

NT4 gG fuse link

1250A / 500V AC - 120kA / 690V AC - 50kA

NT4 is a ceramic knife-blade gG fuse link for low-voltage general-purpose circuit protection. The illustrated 1250A configuration is marked 120kA at 500V AC and 50kA at 690V AC. Select a mechanically and electrically compatible mounting assembly for this fuse link.



Model	NT4
Illustrated rated current	1250A
Published series current range	500-1250A
Operating class	gG
AC voltage / breaking capacity	500V AC / 120kA; 690V AC / 50kA
Standard marking	IEC 60269
Insulating body	Ceramic
Connection	Knife-blade contacts

Protection and selection

The gG utilisation category provides full-range general-purpose overload and short-circuit protection. Select the rated current, AC operating voltage and voltage-specific breaking capacity together. The fuse-link protective function is separate from the current rating of its holder.

NT-NT4-gG-EN | 2026-11

Dimensions and coordination

NT4 / DIMENSIONS IN MILLIMETRES

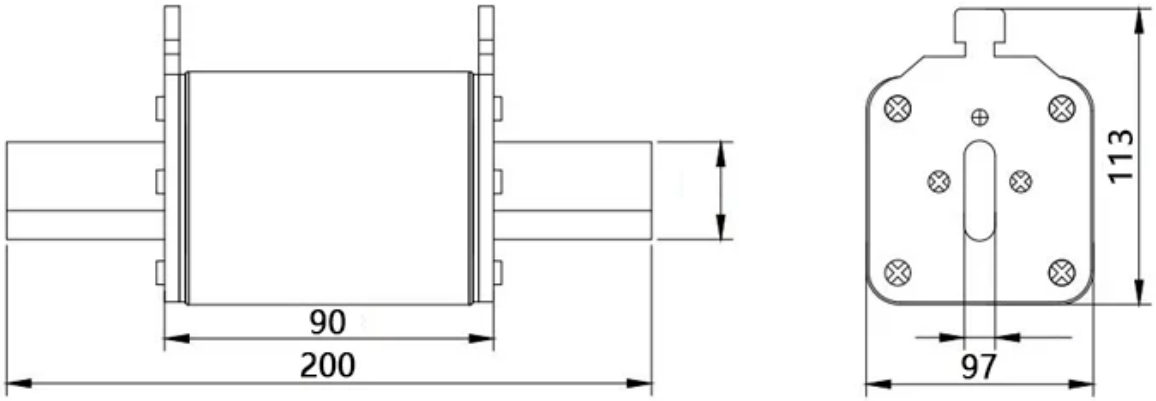

Overall blade-tip length	200mm
Body axial length	90mm
End-view width	97mm
End-view overall height	113mm

Specify your enquiry

Include NT4, gG, 1250A, circuit AC voltage, required breaking capacity and quantity. Match the 200mm overall length and 97 x 113mm end-view envelope. Fuse link and mounting assembly are specified separately. Confirm base compatibility independently; a matching 1250A base is not included.

Product and rating detail

NT4 / 1250A gG / CERAMIC KNIFE-BLADE FUSE





NT4 1250A gG

500V AC / 120kA
690V AC / 50kA
IEC 60269 marking

Ceramic fuse body, knife-blade contacts and screwed end plates.

NT-NT4-gG-EN | 2026-11

Materials and applications

NH FUSE CONSTRUCTION / ORIGINAL MATERIAL REFERENCE

