PD Series Load Centers




PD2F



PD2S



PD4F

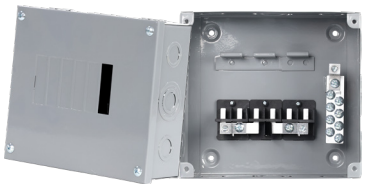

PD6S



PD8F


Application

PD series Load Centers have been designed for safe, reliable distribution and control of electrical power as service entrance equipment in residential, commercial and light industrial premises. They are available in plug-in designs for indoor applications .


Features

- Made out of high quality steel sheet of up to 0.6-1.2mm thickness.
- Matt-finish polyester powder coated paint.
- Knockouts provided on all sides of the enclosure.
- Plug-in breaker construction.
- AC 120/240V, 60Hz.
- Wider enclosure offers ease of wiring and move heat dissipation.
- Flush and surface mounted designs.
- Knockouts for cable entry are provided on top, bottom of the enclosure.

Dimensions



Connection Drawing

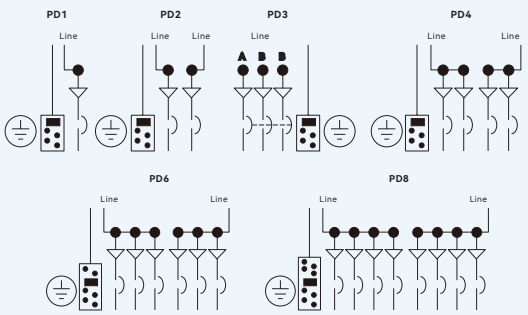

Specifications

Model	Ways	Voltage	Main rating
PD2F	2	120/240V AC	50A
PD2S	2	120/240V AC	50A
PD4F	4	120/240V AC	60A
PD4S	4	120/240V AC	60A
PD6F	6	120/240V AC	
PD6S	6	120/240V AC	
PD8F	8	120/240V AC	
PD8S	8	120/240V AC	