
Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

RO14 cylindrical gG fuse

6A / 400V AC / 100kA / 8.5 x 31.5mm

RO14 is an 8.5 x 31.5mm cylindrical ceramic gG fuse link for general-purpose low-voltage circuit protection. The illustrated 6A configuration is marked 400V AC, 100kA and IEC 60269. This datasheet covers that 400V configuration and its original dimensional outline.

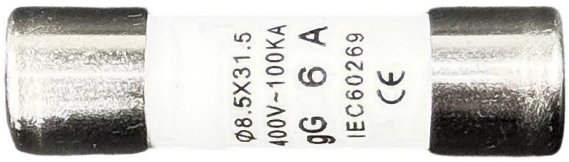

Model / format	RO14 / 8.5 x 31.5mm
Illustrated rated current	6A
Rated voltage	400V AC
Breaking capacity	100kA
Operating class	gG
Standard marking	IEC 60269
Body / contacts	Ceramic / cylindrical end caps


General-purpose circuit protection

The gG utilisation category provides full-range general-purpose protection against overloads and short circuits. Coordinate the 6A fuse current, 400V AC voltage and 100kA breaking capacity with the distribution circuit and the protected equipment.

NT-RO14-EN | 2026-11

Dimensions and installation

RO14 / DIMENSIONS IN MILLIMETRES

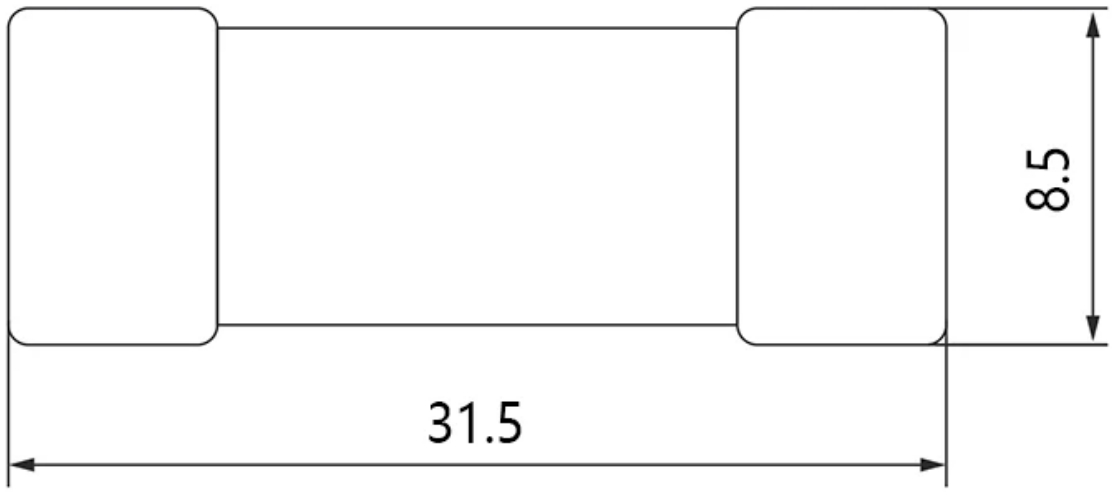

Overall length	31.5mm
Diameter	8.5mm

Holder and circuit coordination

Use a holder suitable for the 8.5 x 31.5mm fuse format, the operating voltage and the selected current. Verify contact engagement, terminal connections and thermal clearances. The holder current rating does not determine the fuse-link protective class or breaking capacity.

Specify your enquiry

Include RO14, 6A, 400V AC, gG, 100kA, 8.5 x 31.5mm and quantity. Provide the distribution circuit and holder requirements for coordination. Fuse link and holder are ordered separately.