Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

RO17 cylindrical gG fuse

100A / 500V AC / 100kA / 22 x 58mm

RO17 is a cylindrical ceramic gG fuse link for low-voltage general-purpose circuit protection. The illustrated 100A configuration is marked 500V AC and 100kA, with a 22 x 58mm fuse envelope and IEC 60269 marking. Metal end caps connect to a matching cylindrical fuse holder.



Model	RO17
Rated current	100A
Rated voltage	500V AC
Breaking capacity	100kA
Operating class	gG
Fuse format	22 x 58mm
Standard marking	IEC 60269
Body	Ceramic
Connection	Cylindrical end caps


General-purpose circuit protection

The gG utilisation category provides full-range general-purpose protection against overloads and short circuits. Coordinate the 100A fuse current, 500V AC voltage and 100kA breaking capacity with the distribution circuit and the protected equipment.

NT-RO17-EN | 2026-11

Dimensions and installation

RO17 / DIMENSIONS IN MILLIMETRES

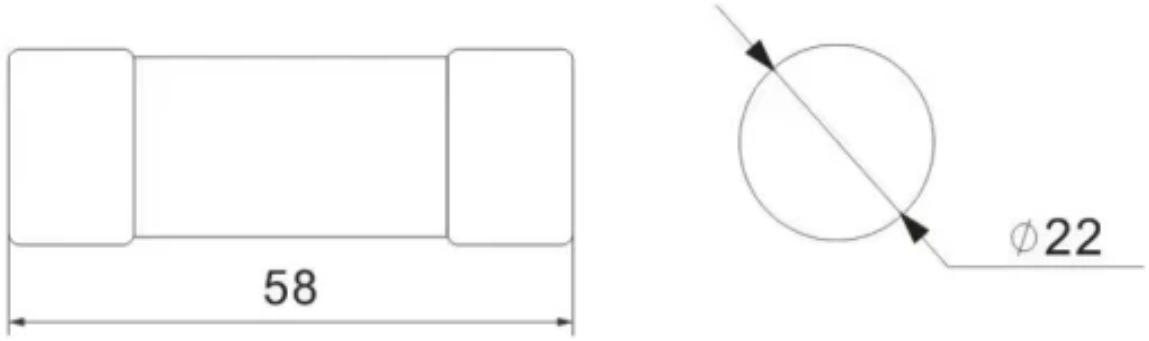

Overall length	58mm
Body diameter	22mm

Holder and circuit coordination

Use a holder suitable for the 22 x 58mm fuse format, the operating voltage and the selected current. Verify contact engagement, terminal connections and thermal clearances. The holder current rating does not determine the fuse-link protective class or breaking capacity.

Specify your enquiry

Include RO17, 100A, 500V AC, gG, 100kA, 22 x 58mm and quantity. Provide the distribution circuit and holder requirements for coordination. Fuse link and holder are ordered separately.