Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

RS0-200A fuse link

500V AC / 200A / aR / 50kA

The NewTrend RS0 is a square-body bolted high-speed fuse link for semiconductor and industrial electrical protection. The 200A configuration is rated 500V AC and 50kA with aR operating class. The RS0-200 dimensional reference covers the 120-200A frame.



Model	RS0
Dimensional reference	RS0-200
Product type	Bolted high-speed fuse link
Illustrated rated current	200A
Series current range	120-200A
Rated voltage	500V AC
Breaking capacity	50kA
Operating class	aR
Standard marking	GB 13539.4

Selected frame dimensions


A	145mm	B	120mm
C	72mm	D	46mm
E	29mm	F	3mm
H	50mm	Slot d	9 x 13.5mm

NT-RS0-200A-EN | 2026-11

Bolted-frame dimensions

RS0 / RS0-200 DIMENSIONAL REFERENCE

序号 No.	产品型号 Product model	额定电压 Rated Voltage	额定电流 Rated current	外形尺寸 Overall dimension (mm)							
				A	B	C	D	E	F	H	Φd
18126	RS0(3)-100	250/500/750	60~100	140	120	70	40	20	2	43	7×10.5
18127	RS0(3)-200	250/500/750	120~200	145	120	72	46	29	3	50	9×13.5
18128	RS0(3)-400	250/500/750	200~400	150	120	72	55	30	3	60	9×13.5
18129	RS0(3)-600	250/500/750	300~600	155	120	76	66	40	5	72	13×19.5

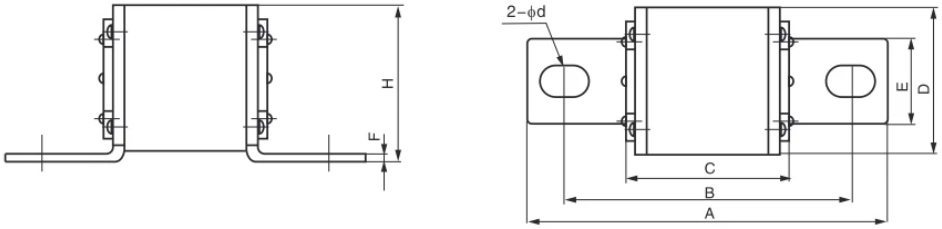

Applications and connection

High-speed fuse protection for industrial power circuits and semiconductor equipment. Bolted end tags connect the fuse link to the electrical assembly. Match the current, circuit voltage, fault level, tag spacing, slot diameter and fuse envelope to the installation.

Specify your enquiry

Include RS0, 200A, 500V AC, aR, 50kA, quantity and the RS0-200 frame dimensions. The original dimensional row is labelled RS0(3)-200; this sheet covers the photographed RS0 version.

NT-RS0-200A-EN | 2026-11