Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

RS15 high-speed aR fuse

32A / 690V AC / 50kA / 10 x 38mm

RS15 is a 10 x 38mm cylindrical ceramic aR fuse link for semiconductor circuit protection. The illustrated 32A configuration is marked 690V AC, 50kA and IEC 60269. Coordinate its partial-range characteristic with suitable circuit overload protection.



Model	RS15
Illustrated rated current	32A
Rated voltage	690V AC
Breaking capacity	50kA
Operating class	aR
Nominal fuse format	10 x 38mm
Standard marking	IEC 60269


Semiconductor protection

The aR utilisation category provides partial-range protection for semiconductor circuits. Coordinate the fuse with the protected equipment and the circuit overload protection. Match the 32A current, 690V AC voltage and 50kA breaking capacity to the application.

NT-RS15-EN | 2026-11

Dimensions and installation

RS15 / DIMENSIONS IN MILLIMETRES

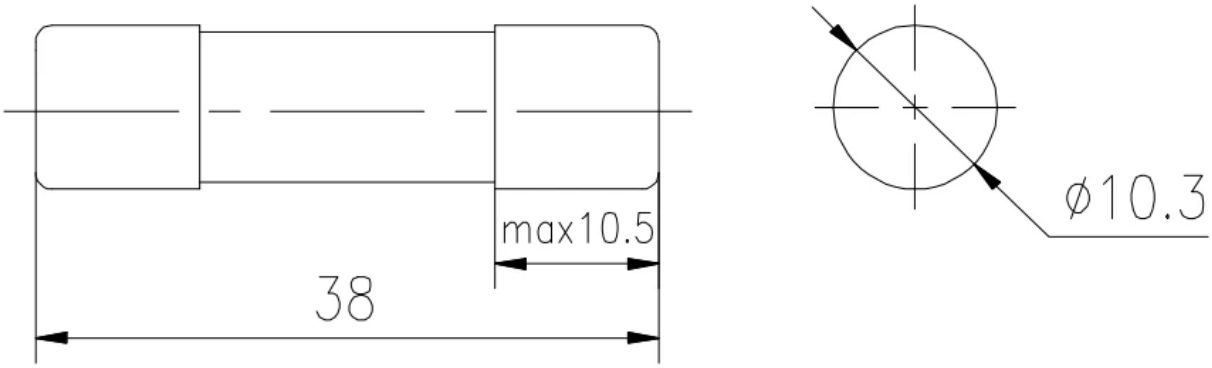

Overall length	38mm
Body diameter	10.3mm
Maximum end-cap axial reference	10.5mm

Holder and circuit coordination

Use a holder suitable for the 10 x 38mm fuse format, the operating voltage and the selected current. Verify contact engagement, terminal connections and thermal clearances. The holder current rating does not determine the fuse-link protective class or breaking capacity.

Specify your enquiry

Include RS15, 32A, 690V AC, aR, 50kA, 10 x 38mm and quantity. Provide the protected semiconductor equipment and holder requirements for coordination. Fuse link and holder are ordered separately.