Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

RT18L-125X fuse holder

125A / 690V AC / 22 x 58mm FUSE LINK

The NewTrend RT18L-125X is a cylindrical fuse holder rated 125A and 690V AC for 22 x 58mm fuse links. The illustrated single-pole holder combines a hinged fuse carrier, status-indicator window, locking tab, screw terminals and TH35 rail mounting.



Model	RT18L-125X
Product type	Cylindrical fuse holder
Rated current	125A
Rated voltage	690V AC
Applicable fuse link	22 x 58mm
Illustrated arrangement	1P
Indicator	Fuse-status indicator
Standard marking	IEC 60269


Operation and mounting

A hinged carrier provides access to the cylindrical fuse link. The holder includes an indicator window and locking tab. TH35 rail mounting and screw terminals support installation in fuse-protection assemblies.

NT-RT18L-125X-EN | 2026-11

Mounting and dimensions

RT18L-125X / SINGLE-POLE INSTALLATION REFERENCE

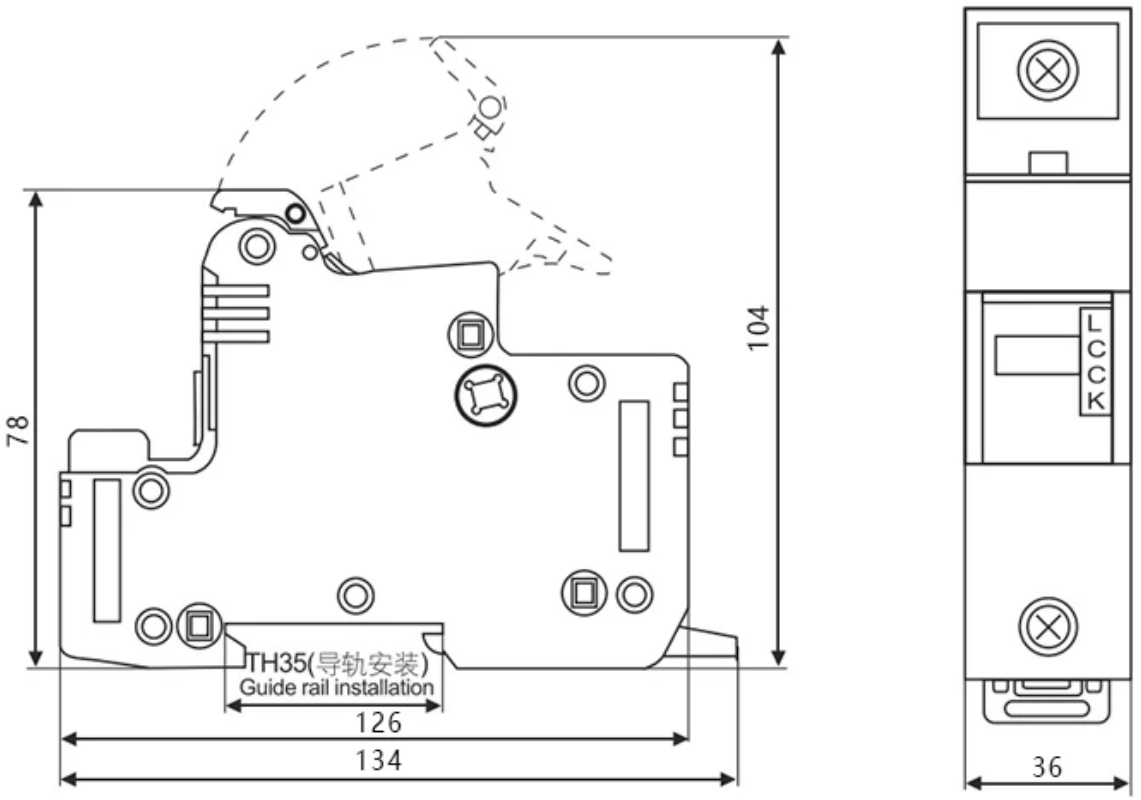

Dimensions in millimetres

Overall base length	134mm	Installation reference length	126mm
Module width	36mm	Closed height reference	78mm
Open height reference	104mm	Mounting rail	TH35 (35mm)

Specify your enquiry

Include RT18L-125X, 125A, 690V AC, 22 x 58mm fuse size, pole arrangement and quantity. Specify the fuse link and holder separately. Match the fuse-link class and protective performance to the application.

NT-RT18L-125X-EN | 2026-11