


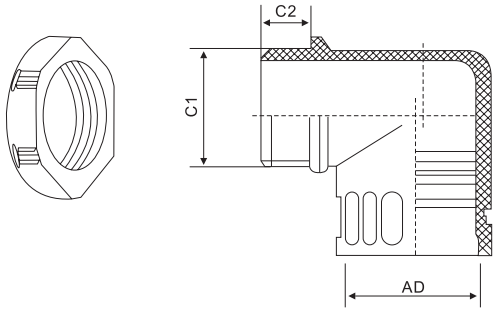

M、PG 型 90 度 波纹管快速接头

- 螺纹规格 : 公制牙 M, 德制牙 PG。
- 材料 : 由 UL 认可尼龙 PA66 制成。
- 工作温度 : 静态 -40~100℃，瞬时热阻高达 120℃ ; 动态 -20~80℃，瞬时热阻高达 100℃。
- 特点 : 特殊夹紧爪之设计，平紧浪管抗拉力强，超快速拔插装卸，提高安装效率。
- 颜色 : 黑色 , 灰色 , 以及特殊颜色，可按要求定做。
- 备注 : 特殊尺寸和型号，请与我们联系。

M, PG Type 90 Degree Quick Connector For Fiexible Pipes

- Thread spec.: Metric, PG.
- Material: Of UL approved nylon PA66.
- Working temperature:-40℃ to 100℃ in static state, instantancous heat resistanceup to 120℃ ;-20℃ to 80℃ in dynamic state. instantaneous heat resistance up to 100℃ centigrade.
- Characteristics: Theclaws of excellent design, to provide a fast & safe commection with the tubing ang to get anexvellent result strength to be the best balanced performers for cable protection system.
- Color: Black,grey as well as special colors that can be designed at request.
- Note:Special size and type, please contant us.

适配软管 Accommodated Pipes	型号 Item No.	螺牙型号 Thread	螺纹外径 (mm) Thread O.D C1	螺纹长度 (mm) Thread Length C2
AD10.0	M-W-M12-10	M12×1.5	12.0	10.0
	M-W-M 16-10	M16×1.5	16.0	10.0
AD13.0	M-W-M16-13.0	M16×1.5	16.0	10.0
	M-W-M18-13.0	M18×1.5	18.0	10.0
AD15.8	M-W-M16-15.8	M16×1.5	16.0	10.0
	M-W-M 18-15.8	M18×1.5	18.0	10.0
	M-W-M20-15.8	M20×1.5	20.0	10.0
AD18.5	M-W-M20-18.5	M20×1.5	20.0	11.0
AD25.0	M-W-M25-25	M25×1.5	25.0	13.0
AD28.5	M-W-M25-28.5	M25×1.5	25.0	13.0
	M-W-M27-28.5	M27×1.5	27.0	13.0
	M-W-M30-28.5	M30×1.5	30.0	13.0
	M-W-M32-28.5	M32×1.5	32.0	13.0
AD34.5	M-W-M32-34.5	M32×1.5	32.0	14.5
	M-W-M36-34.5	M36×1.5	36.0	14.5
	M-W-M40-34.5	M40×1.5	40.0	14.5
AD42.5	M-W-M40-42.5	M40×1.5	40.0	14.5
AD54.5	M-W-M50-54.5	M50×1.5	50.0	16.0
	M-W-M63-54.5	M63×1.5	63.0	16.0