


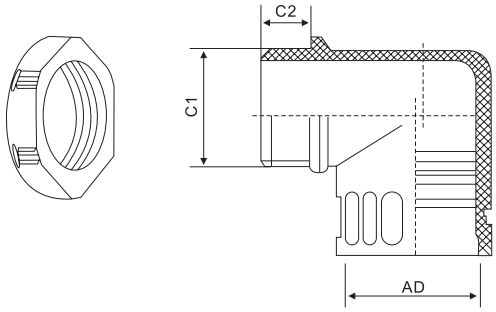

M、PG 型 90 度 波纹管快速接头

- 螺纹规格 : 公制牙 M, 德制牙 PG。
- 材料 : 由 UL 认可尼龙 PA66 制成。
- 工作温度 : 静态 -40~100℃，瞬时热阻高达 120℃ ; 动态 -20~80℃，瞬时热阻高达 100℃。
- 特点 : 特殊夹紧爪之设计，平紧浪管抗拉力强，超快速拔插装卸，提高安装效率。
- 颜色 : 黑色 , 灰色 , 以及特殊颜色，可按要求定做。
- 备注 : 特殊尺寸和型号，请与我们联系。

适配软管 Accommodated Pipes	型号 Item No.	螺牙型号 Thread	螺纹外径 (mm) Thread O.D C1	螺纹长度 (mm) Thread Length C2
AD10.0	M-W-PG7-10	PG7	12.5	10.0
AD13	M-W-PG9-13	PG9	15.2	10.0
AD15.8	M-W-PG11-15.8	PG11	18.6	10.0
	M-W-PG13.5-15.8	PG13.5	20.4	10.0
AD18.5	M-W-PG13.5-18.5	PG13.5	20.4	11.0
AD21.2	M-W-PG16-21.2	PG16	22.5	13.0
AD28.5	M-W-PG21-28.5	PG21	28.3	13.0
AD32.0	M-W-PG29-32	PG29	37.0	14.0
AD34.5	M-W-PG29-34.5	PG29	37.0	14.0
AD42.5	M-W-PG36-42.5	PG36	47.0	14.0
AD54.5	M-W-PG48-54.5	PG48	59.3	15.5

M, PG Type 90 Degree Quick Connector For Fiexible Pipes

- Thread spec.: Metric, PG.
- Material: Of UL approved nylon PA66.
- Working temperature:-40℃ to 100℃ in static state, instantancous heat resistanceup to 120℃ ;-20℃ to 80℃ in dynamic state. instantaneous heat resistance up to 100℃ centigrade.
- Characteristics: Theclaws of excellent design, to provide a fast & safe commection with the tubing ang to get anexvellent result strength to be the best balanced performers for cable protection system.
- Color: Black,grey as well as special colors that can be designed at request.
- Note:Special size and type, please contant us.