
● Technical data

Rated supply voltage	AC 220V
Operation voltage range	AC 80V~350V
Rated frequency	50/60Hz
Error	2%
＞U and ＜U trip delay	0.5S
Reset/start delay	1s~300s
Voltage measurement accuracy	1%(Not exceeding 1% of the overall range)
Rated insulation voltage	400V
Output contact	1NO
Electrical life	10^5
Mechanical life	10^6
Protection degree	Ip20
Pollution degree	3
Altitude	≤2000m
Operatintg temperature	-50℃~55℃
Humidity	≤50%at40℃(without condensation)
Storage temperature	-30℃~70℃


● Default setting

Technical parameter	Setting range	Step	Factory setting
Overcurrent trip value	1~63A	1A	20A
Reset/start delay	1s~300s	1s	5s

Current specification	15A	25A	32A	50A	63A
Rated operating current(In,A)	15	25	32	50	63
Maximum operating current Imax (A,within 10min)	25	30	40	60	80
Max.power of load(kW)	3.6	5.5	7	11	13.9

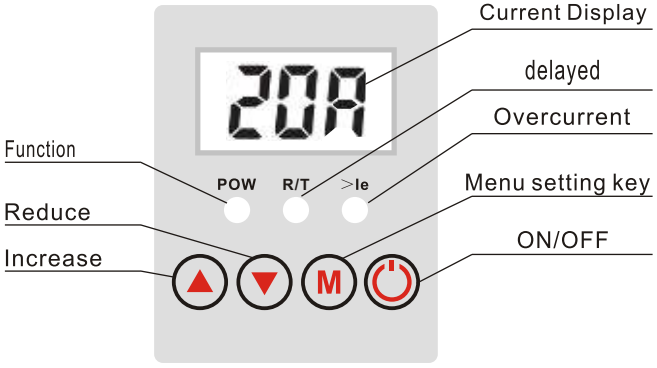

● Function setting

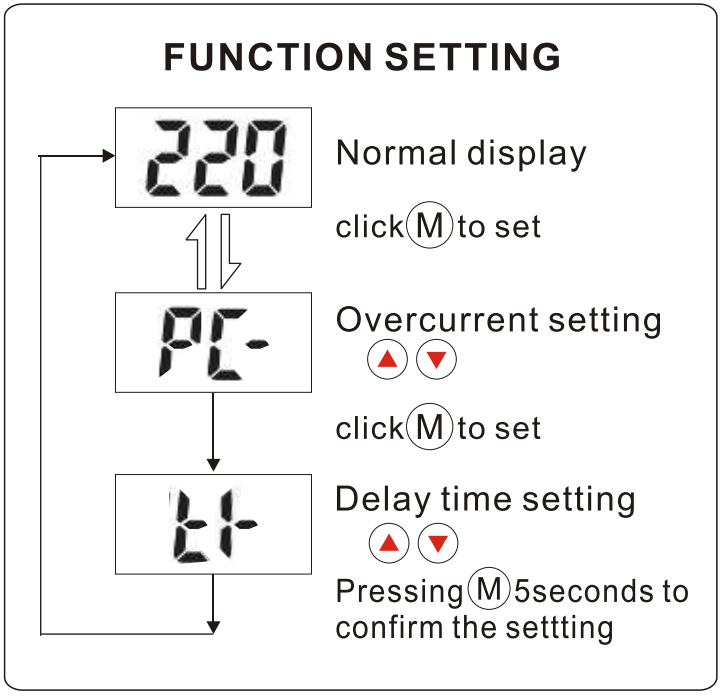

● Wiring and shape dimensions

