

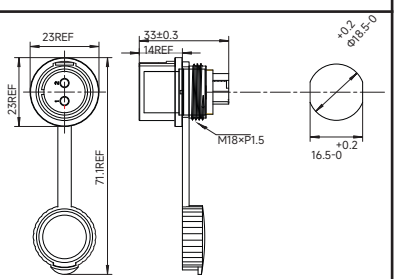
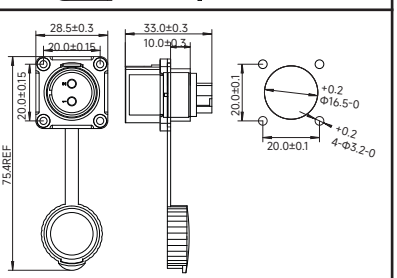
P-16产品信息图/外观尺寸图(单位: mm)

P-16 Product Information/Dimensions (Unit: mm)

P 16 电源/信号 Power/Signal	产品系列 Product Series	P-16			
	芯数 Number of cores	2芯 2 cores	3芯 3 cores	4芯 4 cores	5芯 5 cores
	额定电流(A) Rated current (A)	10	10	5	5
	额定电压(V) Rated voltage (V)	400	400	400	250
	适用线径(mm) Applicable wire diameter (mm)	Φ3.0~Φ5.0	Φ5.0~Φ7.0	Φ7.0~Φ9.0	(可选配) (Optional)
	接线规格 Wiring specifications	1.0~1.5mm²/ 18~16AWG	1.0~1.5mm²/ 18~16AWG	1.0~1.5mm²/ 18~16AWG	0.34~0.5mm²/ 22~20AWG
	防护等级 Protection level	连接状态 IP 68 Connection Status IP 68			
	接线类型 Wiring type	螺丝压接 Screw crimping	螺丝压接 Screw crimping	螺丝压接 Screw crimping	螺丝压接 Screw crimping

例图 Example	材质 Material	料号 Material Number					外观尺寸图(单位:mm) Dimensions (unit: mm)
插头 Plug 	塑胶 plastic / 金属 metal	公 male	P-16-C02PE -11-001	P-16-C03PE -11-001	P-16-C04PE -11-001	P-16-C05PE -11-001	
		母 female	P-16-J02PE -11-001	P-16-J03PE -11-001	P-16-J04PE -11-001	P-16-J05PE -11-001	
对接插座 Docking Socket 		公 male	P-16-C02PP -11-001	P-16-C03PP -11-001	P-16-C04PP -11-001	P-16-C05PP -11-001	
		母 female	P-16-J02PP -11-001	P-16-J03PP -11-001	P-16-J04PP -11-001	P-16-J05PP -11-001	
单孔直式插座 Single Hole Straight Socket 	金属 metal	公 male	P-16-C02SX -11-101	P-16-C03SX -11-101	P-16-C04S X -11-101	P-16-C05S X -11-101	
		母 female	P-16-J02SX -11-101	P-16-J03SX -11-101	P-16-J04S X -11-101	P-16-J05S X -11-101	
四孔法兰插座 Four-hole Fange Socket 		公 male	P-16-C02SX -11-401	P-16-C03SX -11-401	P-16-C04S X -11-401	P-16-C05S X -11-401	
		母 female	P-16-J02SX -11-401	P-16-J03SX -11-401	P-16-J04S X -11-401	P-16-J05S X -11-401	