TFM Meter Bank



TFM-100A/2T

Features

- Standard meter bank are manufactured from 1.5mm galvanized steel sheet with a baked gray powder polyester paint finish to improve corrosion resistance.
- The meter bank is available single phase ,3 wire configurations.
- Ample gutter space for easy wiring.
- Convenient knockouts in back and bottom.
- Meter bank are designed to accept conduit hubs from 1" to 2-1/2" size.
- Meter bank accept for GE type breakers.



TFM-100A/3T


Specification

Product Number	Description	Outline Dimensions			Match Breaker
		H	W	D	
TFM-100A/2T	1 Ph,2 stack 2x100A with 4 jaws base	540	565	114	THQL 2P
TFM-100A/3T	1 Ph,3 stack 2x100A with 4 jaws base	765	565	114	THQL 2P
TFM-100A/4T	1 Ph,4 stack 2x100A with 4 jaws base	985	565	140	THQL 2P
TFM-125ST	1 Ph,1 stack 2x125A with 4 jaws base	360	306	95	THQL 2P
TFM-125AL	1 Ph,1 stack 2x125A with 4 jaws base	360	306	95	THQL 2P
TFM-125AL/2T	1 Ph,2 stack 2x125A with 4 jaws base	510	510	104	THQL 2P
TFM-125A/4T	1 Phase, 125A ,4 jaw, ring type	827.9	508	108	THQL 2P
TFM-200A/2T	1 Ph,2 stack 2x200A with 4 jaws base	845	720	185	TQD
S-TS-125-MS	1 Ph,1 stack 2x125A with 4 jaws base	762	307	156	/



TFM-100A/4T

Outline Dimensions

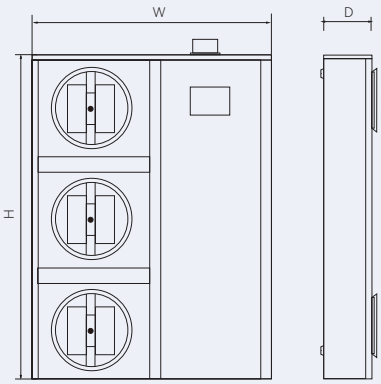



TFM-125ST



TFM-125AL/2T



TFM-125A/4T



TFM-200A/2T



S-TS-125-MS



TFM-125AL

Stainless Steel Sealing Ring



SR-1



SR-2




SR-3




SR-4

Product Number	Description	Thickness
SR-1	Slip lock type	0.35mm
SR-2	Screw type	0.35mm
SR-3	Screw type	0.35mm
SR-4	Screw type	1.5mm

HUB





1" 1-1/4" 1-1/2" 2"

Product Number	Description
HUB—3/4"	3/4"
HUB—1"	1"
HUB—1-1/4"	1-1/4"
HUB—1-1/2"	1-1/2"
HUB—2"	2"
HUB—2-1/2"	2-1/2"