
TFP-100/125 Square Meter Sockets



TFP-100A/4J



TFP-125A/4J

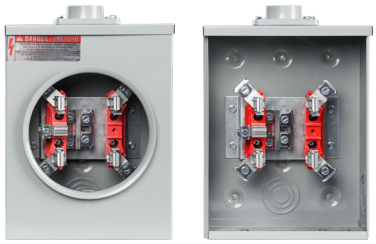

TFP-125A/5J



TFP-125AN/4J



TFP-125AN/5J


Features

- Standard meter sockets are manufactured from 1.0-1.5mm galvanized steel sheet with a baked gray powder polyester paint finish to improve corrosion resistance.
- These meter sockets are suitable for single phase , service voltage 600Vac Max.
- Ample gutter space for easy wiring.
- Convenient knockouts in side back and bottom.
- Lay in type terminals with pressure plates for easy connections.
- Meter sockets are designed to accept conduit hubs from 1" to 2-1/2" size.


Specification

Product Number	Description	Outline Dimensions		
		H	W	D
TFP-100A/4J	1 Phase, 100A ,4 jaw, ring type	226.5	194	111
TFP-125AN/4J	1 Phase, 125A ,4 jaw, ringless type	324.2	219	116.2
TFP-125AN/5J	1 Phase, 125A ,5 jaw, ringless type	324.2	219	116.2

Outline Dimensions

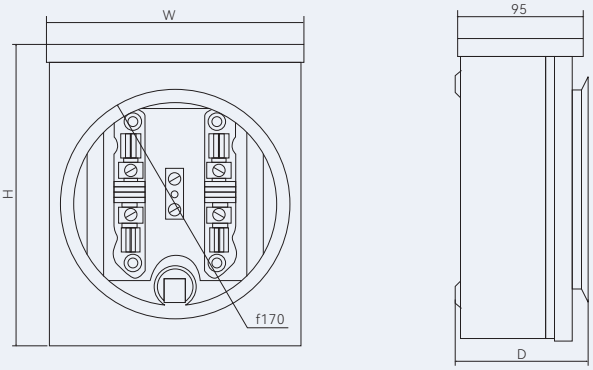

Replacement Block Assemblies



B125- 4J

Use on TFP-125A/4J



B125- 5J

Use on TFP-125A/5J