TFP-200 Square Meter Sockets



TFP-200A/4J



TFP-200A/5J



TFP-200AN/4J



TFP-200AN/4J with lock



TFP-200AN/5J



TFP-200AN/5J with lock



TFP-200AN/7J with lock



TFP-20AN/13J



TFP-200ADN/7J


Features

- Standard meter sockets are manufactured from 1.0-1.5mm galvanized steel sheet with a baked gray powder polyester paint finish to improve corrosion resistance.
- These meter sockets are suitable for service voltage 600Vac Max .
- Ample gutter space for easy wiring.
- Convenient knockouts in side back and bottom.
- Lay in type terminals with pressure plates for easy connections.
- Meter sockets are designed to accept conduit hubs from 1" to 2-1/2" size.


Specification

Product Number	Description	Outline Dimensions		
		H	W	D
TFP-200A/4J	1 Phase, 200A , 4 jaw, ring type	412	222	134
TFP-200A/5J	1 Phase, 200A, 5 jaw, ring type	412	222	134
TFP-200A/7J	3 Phase, 200A , 7 jaw, ring type	498	235	136
TFP-200AN/4J	1 Phase, 200A , 4 jaw, ringless type	429	208	130
TFP-200AN/5J	1 Phase, 200A , 5 jaw, ringless type	429	208	130
TFP-200AN/7J	3 Phase, 200A , 7 jaw, ringless type	429	208	130
TFP-20AN/13J	3 Phase, 20A , 13 jaw, ringless type	360	210	95

Outline Dimensions

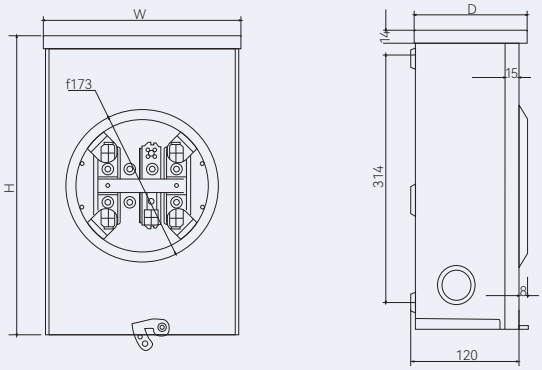


Replacement Block Assemblies




B200N-4J

Use on TFP-200AN/4J TFP-200A/7J



B200-4J

Use on TFP-200A/4J



B200N-5J

Use on TFP-200AN/5J