TLS Series Economy Load Centers



TLS2-2WAY



TLS4-4WAY



TLS6-6WAY



TLS8-8WAY

Application

TLS series are economy load centers which can substitute some of the TL series Load Centers. They have been designed for safe, reliable distribution and control of electrical power as service entrance equipment in residential, commercial and light industrial premises.


Features

- Made out of high quality steel sheet of up to 0.5-1.5mm thickness.
- Matt-finish polyester powder coated paint.
- Knockouts provided on all sides of the enclosure.
- Accept GE type 1" THQL breakers.
- Suitable for single-phase, three-wire, rated current to 100A, service voltage to 120/240Vac.
- Wider enclosure offers ease of wiring and move heat dissipation.
- Flush and surface mounted designs.
- Knockouts for cable entry are provided on top, bottom of the enclosure.

Specifications

Product Number	Front Type	Main Ampere Rating	Rated Voltage(V)	Outline Dimensions			No. of Way
				H	W	D	
TLS2-2WAY	flush/surface	40, 60	120/240	203	143	62	2
TLS4-4WAY	flush/surface	40, 100	120/240	198	194	62	4
TLS6-6WAY	flush/surface	40, 100	120/240	198	246	62	6
TLS8-8WAY	flush/surface	40, 100	120/240	200	300	62	8
TLS12-12WAY	flush/surface	40, 100	120/240	246	331	62	12

Outline Dimensions

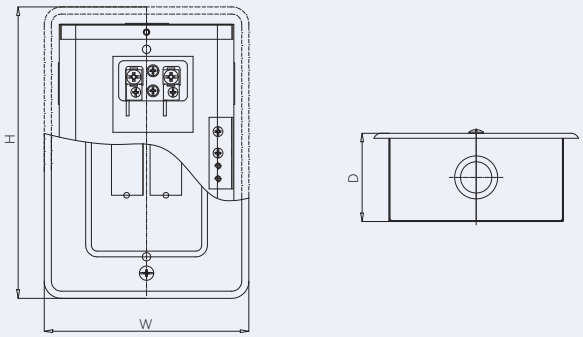

Connection Drawing

