YB-100 Round Meter Sockets



YB-100 4J （2 EXIT）



YB-100 5J （2 EXIT）



YB-100 5J with Grounding Wire（2 EXIT）



YB-100 6J （2 EXIT）

Application

- Temporary Service
- Outdoor Advertising
- Small Customer Service
- Other Low Amperage Requirements


Features

Our enclosure is made of die cast aluminum. The electro-statically applied epoxy and polyester resins, which are baked on, form a durable, light gray exterior. The current carrying parts are made of copper alloy. The ground connector is designed to insure a positive electrical connection by effectively clamping the conductor against a serrated surface.

Specification

Product Number	Description	Fixed Hubs Size
YB-100A/4J	1 Phase, 100A ,120/240Vac,4 jaw	1/2-2"
YB-100A/5J	1 Phase, 100A ,120/240Vac,5 jaw	1/2-2"
YB-100A/6J	1 Phase, 100A ,120/240Vac,6 jaw	1/2-2"
YB-100S	1 Phase, 100A ,120/240Vac,4 jaw	1/2-2"

Outline Dimensions

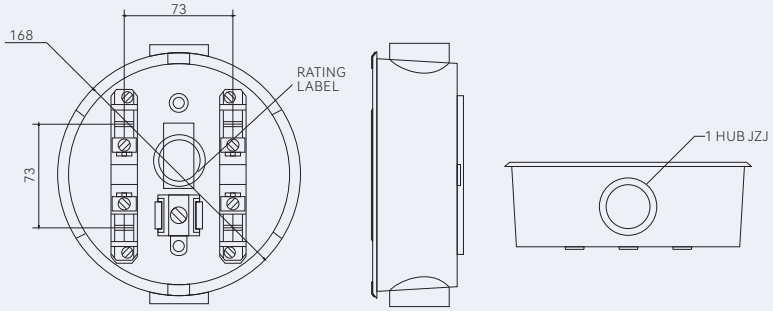



YB-100R



YB-100S



YB-100L



YB-100AT



1/2”



3/4”







1”



1-1/4”



B100 S

Use on YB-100 and TFP-100A



B100 T

Use on YB-100 and TFP-100A



B100 AT

Use on YB-100 and TFP-100A



B100 R

Use on YB-100 and TFP-100A



B100

Use on YB-100 and TFP-100A



B100 L

Use on YB-100 and TFP-100A