Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

FB26-100 screw fuse holder

100A / 500V / SINGLE POLE

FB26-100 is a single-pole screw fuse holder for RO26 / D03 fuse links. The catalog holder rating is 100A at 500V. It combines an insulating base with a removable screw cap and electrical terminals. The fuse link is specified separately.



Model	FB26-100
Rated holder current	100A
Rated voltage	500V
Applicable fuse link	RO26 / D03
Poles	1P
Mounting	Busbar mounting plate

Construction and application


For compatible screw-fuse distribution and equipment protection assemblies. Select the correct fuse-link size and rating, verify the terminal and mounting arrangement, and specify the fuse link separately. The holder current is an accessory rating and does not define the fuse interrupting capacity.

NT-FB26-100-EN | 2026-11

Dimensions and ordering

FB26-100 / DIMENSIONS IN MILLIMETRES

序号 No.	产品型号 Product model	配装熔断体 Applicable fuse link	额定电压 Rated Voltage (V)	额定电流 Rated current (A)	外形尺寸 Overall dimension (mm)
18094	FB26-100	R026 D03	500	100	详细数据见下图 Refer to for detailed data

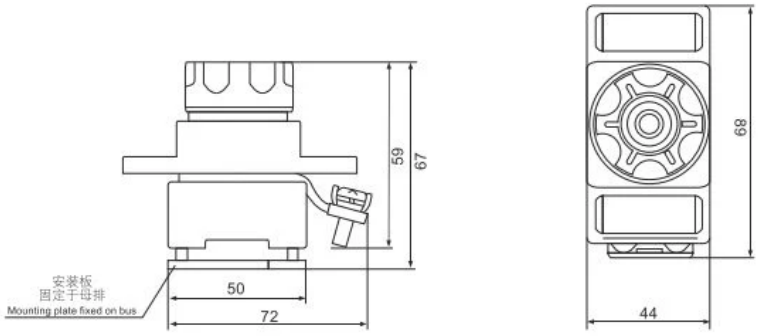

Side-view overall height	67mm
Side-view inner height	59mm
Side-view overall horizontal span	72mm
Side-view lower reference	50mm
Top-view base length	68mm
Top-view base width	44mm

Specify your enquiry

Include FB26-100, 100A, 500V, 1P and quantity. Confirm busbar mounting plate and RO26 / D03 fuse-link compatibility. Check the dimensions against the matching views in the original drawing. Isolate the circuit before fuse replacement and follow the supplied installation instructions.

NT-FB26-100-EN | 2026-11