
Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

RT18L-63X fuse holder

63A / 690V AC / 14 x 51mm FUSE LINK

The NewTrend RT18L-63X is a cylindrical fuse holder rated 63A and 690V AC for 14 x 51mm fuse links. It combines a hinged fuse carrier, status-indicator window, locking tab, screw terminals and TH35 rail mounting. Original product views show single-pole and two-pole assemblies.

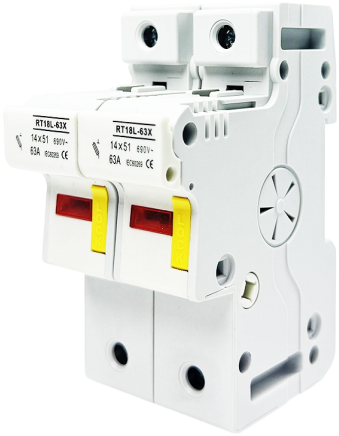

Model	RT18L-63X
Product type	Cylindrical fuse holder
Rated current	63A
Rated voltage	690V AC
Applicable fuse link	14 x 51mm
Illustrated arrangements	1P and 2P
Indicator	Fuse-status indicator
Standard marking	IEC 60269

Operation and mounting


A hinged carrier provides access to the cylindrical fuse link. The holder includes an indicator window and locking tab. TH35 rail mounting and screw terminals support installation in fuse-protection assemblies.

NT-RT18L-63X-EN | 2026-11

Shanghai Newtrend Electric Co., Ltd.
No. 618 North Huting Road | 201615 | Shanghai | China
WhatsApp / WeChat: +86-18019187010 | sales@sntelec.com | www.sntelec.com

Mounting and dimensions

RT18L-63X / SINGLE-POLE MOUNTING INTERFACE

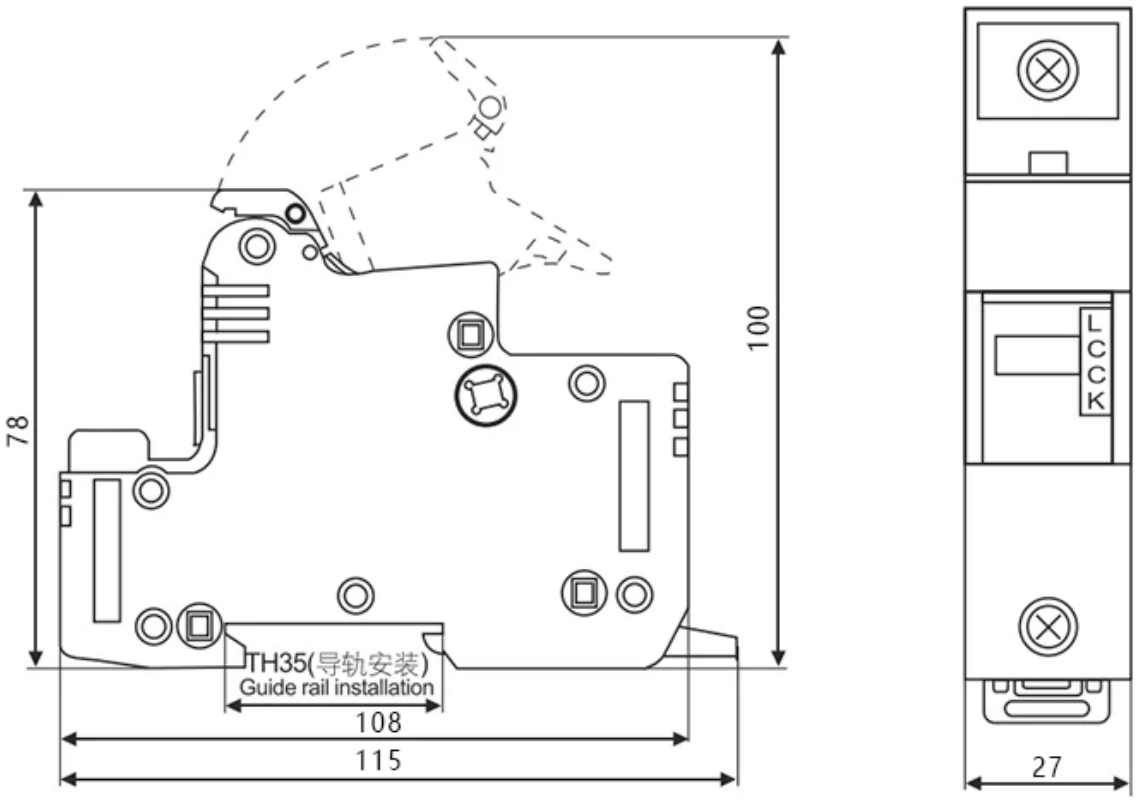

Dimensions in millimetres

Overall base length	115mm	Installation reference length	108mm
Module width	27mm	Closed height reference	78mm
Open height reference	100mm	Mounting rail	TH35 (35mm)

Specify your enquiry

Include RT18L-63X, 63A, 690V AC, 14 x 51mm fuse size, pole arrangement and quantity. Specify the fuse link and holder separately. Match the fuse-link class and protective performance to the application.


NT-RT18L-63X-EN | 2026-11

Product details and fuse access


RT18L-63X / ORIGINAL PRODUCT VIEWS



Single-pole front and indicator

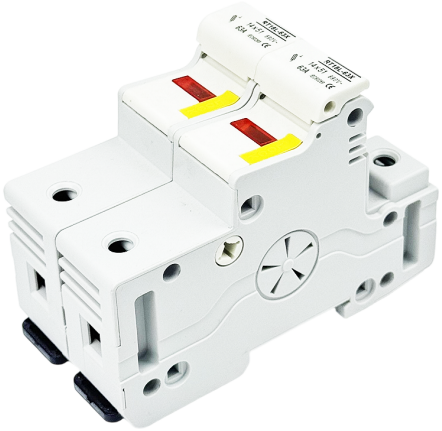

Two-pole assembly and contacts

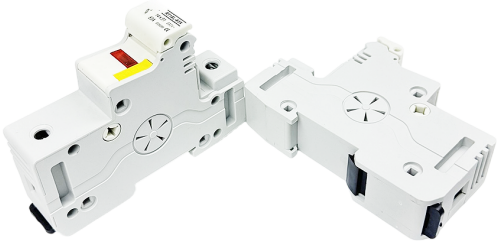

Side profile and rear mounting



Open holder and separate fuse link

Fuse shown beside the open holder: 14 x 51mm, gG, 50A, 500V AC, 100kA. These fuse-link ratings are separate from the holder rating of 63A and 690V AC. Holder and fuse link are specified separately.

NT-RT18L-63X-EN | 2026-11